



SHOOTER DEVICE QUICK START GUIDE

MODEL SH-202US

WWW.SAFE-SHOOT.COM

SAFESHOOT USA Inc.
600 S. Spring Street Los Angeles, CA 90014 Suite PH11 Tel: 855 700 1818
Email: support@safe-shoot.com

**THIS QUICK START GUIDE DOES NOT
REPLACE THE SAFESHOOT SHOOTER DEVICE MANUAL.
PLEASE READ CAREFULLY AND UNDERSTAND ALL CAUTIONS
AND WARNINGS LISTED IN THE FULL MANUAL.**

Overview




1 Device Preparation

- A** Untighten and open the tail cap by turning left.



- B** Insert two CR123 batteries (using the battery sleeve included) or one 18650 battery (without the sleeve). Utilize fresh batteries only.

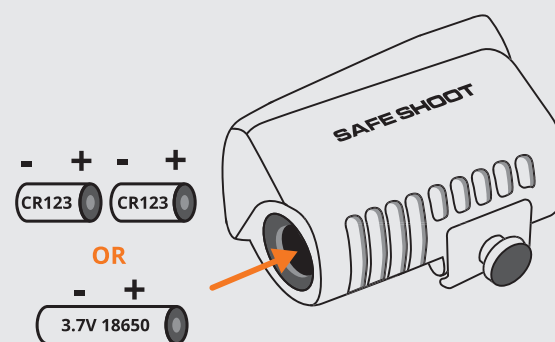


C



Tighten the tail cap by turning right.

D

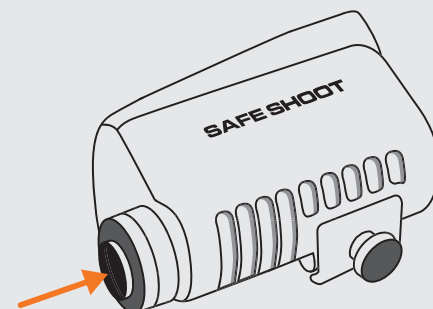


Press the **POWER ON** button.

E

Verify that all LEDs light up.


If the LEDs indicators don't turn on, make sure the batteries are new and inserted in the correct orientation.

If the problem continues please contact us:
www.safe-shoot.com/support

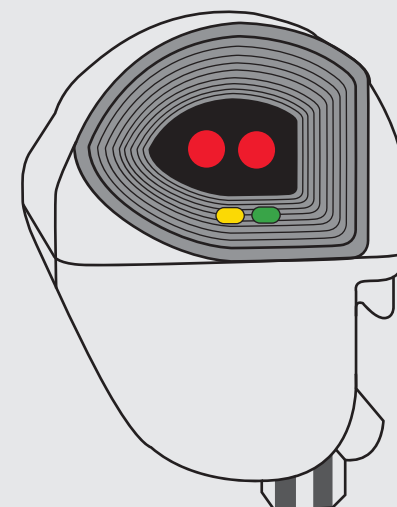

2 Device Registration / Activation

For new devices only

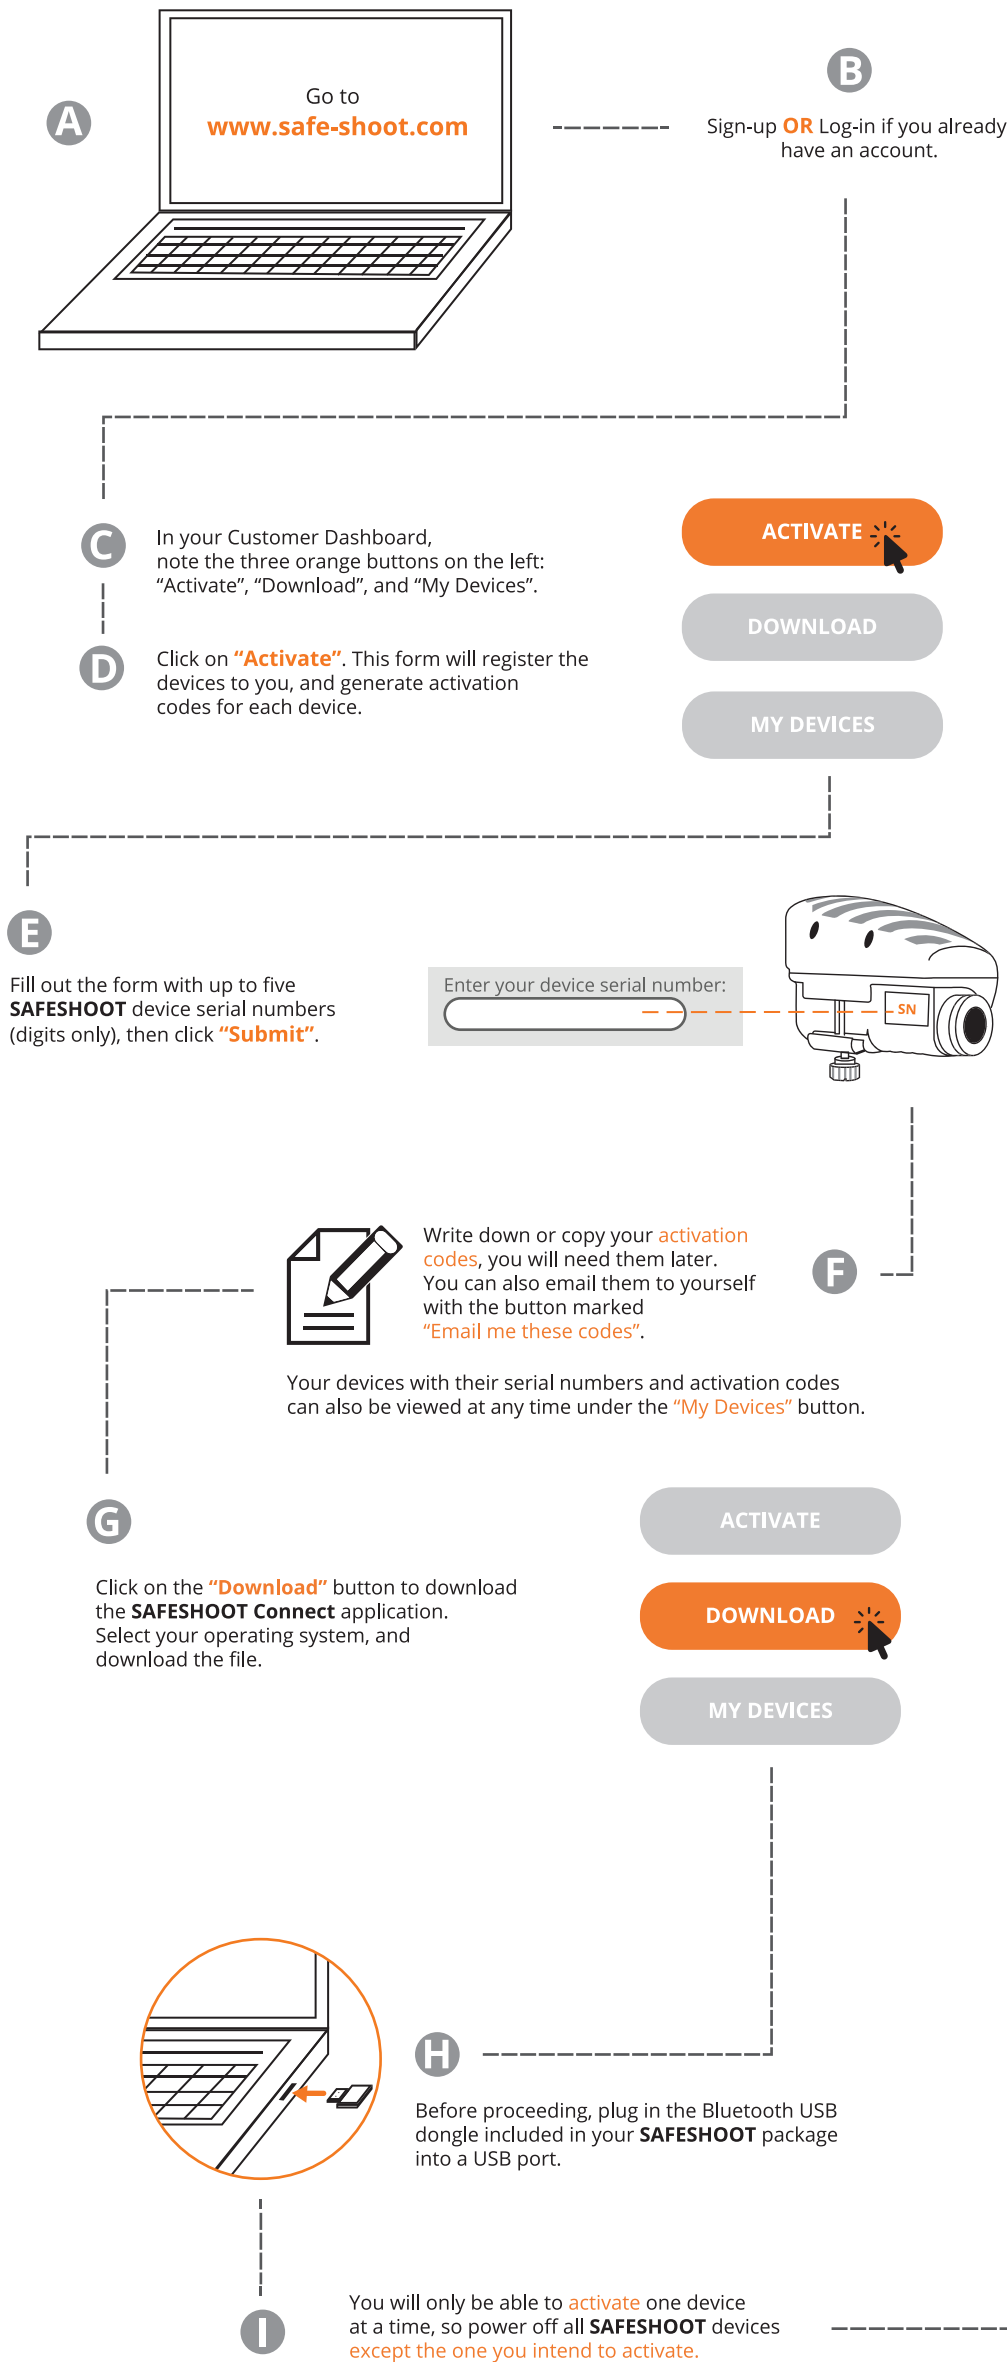

IMPORTANT!

FROM HERE ON OUT, **DO NOT POWER OFF YOUR DEVICE** AT ANY TIME UNTIL THE ACTIVATION IS COMPLETED.

J Once the program finishes downloading, launch it. Note for **Windows users** - The application must be run using system administrator privileges. To do so - **right click** on the application icon and select **"Run as Administrator"**.

You may have a follow up prompt asking if you wish to allow this program to make changes to your computer, select **"Yes"**.

K Enter your device **activation code**, including hyphens, into the form.

Confirm that your device is **powered on** and is no more than 5 feet away from the computer.


L Press **"Activate"**.
The program will locate your device. Follow the prompts on the screen.

M After the activation process is completed, a beep sound will be heard.




YOUR DEVICE IS NOW ACTIVATED
You may proceed with the next operating instructions.

3 Device Installation and Warm-up

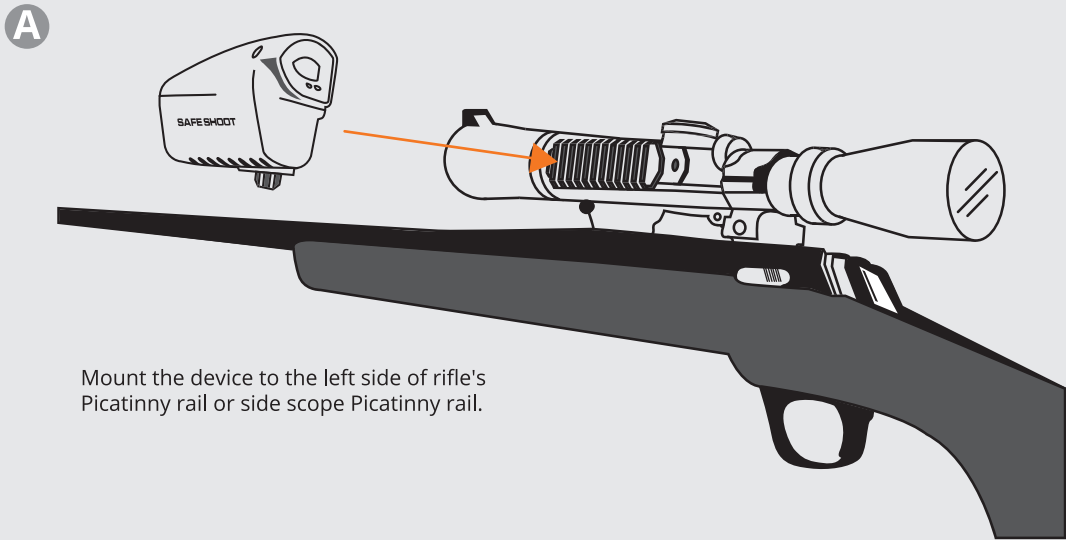


Mount the device to the left side of rifle's Picatinny rail or side scope Picatinny rail.

Correct Placement of Picatinny Adapter:

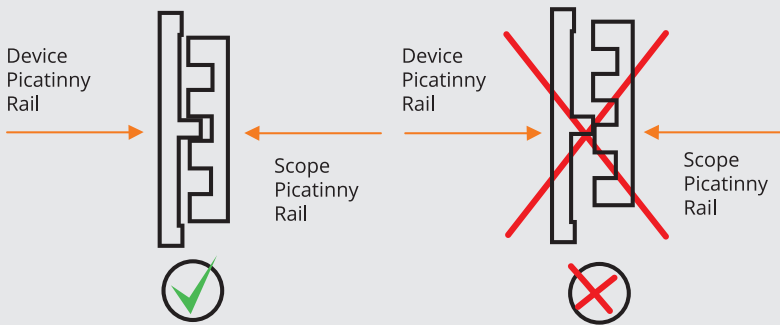


B

Ensure that the screw is tightened sufficiently to secure the device.
DO NOT use any tools to tighten the screw.

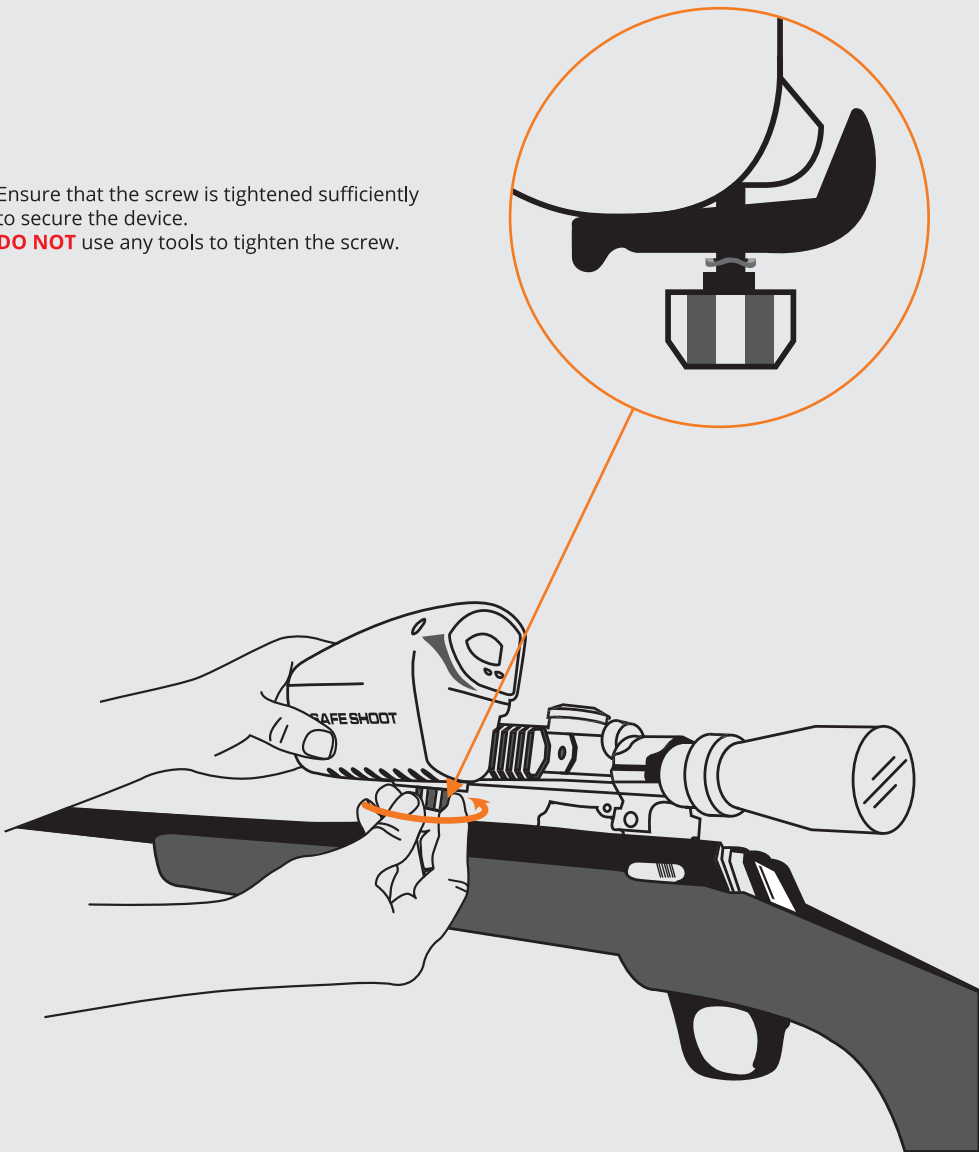


C

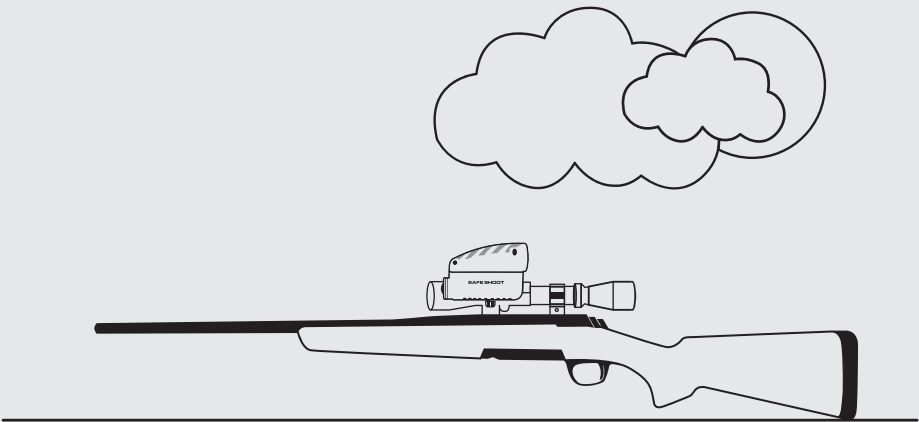

Leave it still upright with a clear view of the open sky for at least 3 minutes.

D

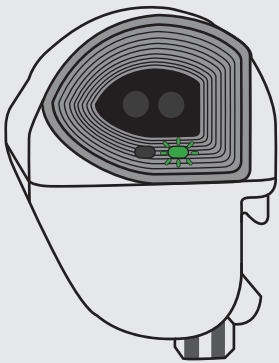

Your device should turn to **Normal Operation, System is in Order** (green LED flashing).

E

If the green led doesn't flash, move the firearm with **SAFESHOOT** device installed on it in a "Figure 8 motion", preferably for 3 times.



4

You are NOW READY
HAVE A SAFE HUNT